



**GENERAL NOTES**

- WALL SCHEDULE**
- METAL STUD WALL WITH 1/2" TYPE 'X' GYPSUM BOARD EACH SIDE EXPOSED TO VIEW - - PROVIDE "MR." GYPSUM BOARD AT "UET WALLS"
  - FULL HEIGHT ONE HOUR FIRE PARTITION WITH METAL STUD AND ONE LAYER 1/2" TYPE 'X' GYPSUM BOARD EACH SIDE
  - CONCRETE MASONRY UNIT WALL
  - GYPSUM BOARD FURR DOWN
  - 16 GA. METAL STUD WALL
  - ACCENT RAILS SEE NOTE 10260
- NUMBERED NOTES**
- DIV. 3 - CONCRETE**  
03031 CAST IN PLACE EXPANSION JOINT EQ. TO "BALCO" 6FV5-E x 1". PROVIDE CORRECT COVER PLATE FOR SPECIFIED FLOOR FINISH. CONTRACTOR SHALL BE RESPONSIBLE FOR FINAL INSTALLATION AT COMPLETION OF FINISH FLOORING. - SEE K1/A410
  - DIV. 6 - WOODS and PLASTICS**  
06400 REFER E11/A601 FOR LOCKER BASE
  - DIV. 9 - FINISHES**  
09282 INTERIOR WALL / CEILING EXPANSION JOINT EQUAL TO "DALITE" 18FG(C)-1, MILL ALUMINUM FINISH
  - DIV. 10 - SPECIALTIES**  
10260 2 ACCENT RAILS VERIFY RAIL HEIGHT'S WITH ARCHITECT  
10500 1'-0" X 1'-0" X 5'-0" SINGLE TIER LOCKER. SEE A600 SERIES DRAWINGS FOR BASE DETAIL  
10502 FILLER PANE  
10520 RECESSED MOUNTED FIRE EXTINGUISHER CABINET WITH 5 LB. "ABC" EXTINGUISHER
  - DIV. 11 - EQUIPMENT**  
11133 OVERHEAD CONCEALED PROJECTOR EQUAL TO "DALITE" ADVANTAGE ELECTROL 1'-3" H x 9'-8" W WITH MATT WHITE SURFACE x 1.4 AMP'S - - INCLUDE TAIL FOR BOTTOM OF SCREEN TO BE 4'-0" ABOVE FINISH FLOOR - VERIFY LOCATION OF SCREEN PRIOR TO ELECTRICAL ROUGH-IN

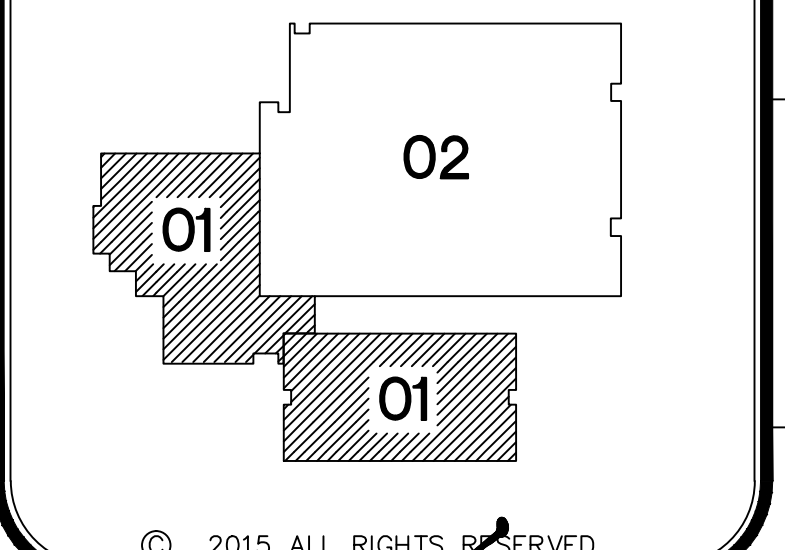

© 2015 ALL RIGHTS RESERVED

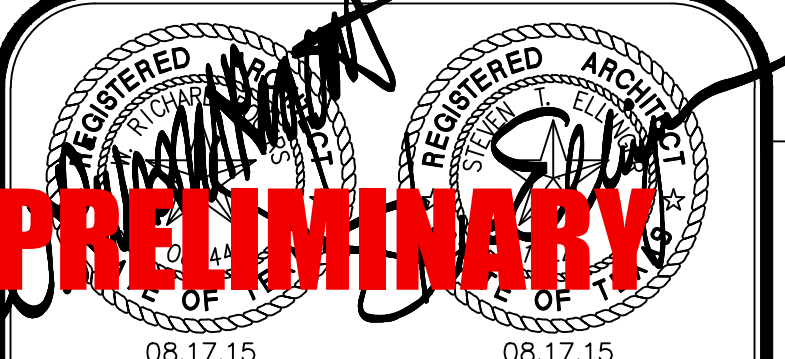

**CADCO**  
ARCHITECTS - ENGINEERS, INC.  
2401 S. WILLIS, STE. 200 ABILENE, TEXAS 79605

**NEW ELEMENTARY SCHOOL FOR MILES I.S.D.**  
MILES, TEXAS

PROJECT NUMBER 626  
AUGUST 17th, 2015

**A101**

**M1 IDENTIFICATION FLOOR PLAN AREA 01 (EXISTING CONSTRUCTION - 6,158 nsf)**

3/32"=1'-0"



**PRELIMINARY**